

CN-GP50U

Operating Instructions

Picture Viewer
Phone (Hands-Free)

English (US)

- Before using this product, please read the "Safety information" in the "Important Information" document.

Copyright

The information contained herein may be changed at any time without prior notification. This manual nor any parts thereof may not be reproduced for any purpose whatsoever without the express written consent of Matsushita Electric Industrial Co., Ltd., nor transmitted in any form either electronically or mechanically, including photocopying and recording. All technical specifications, drawings etc are subject to copyright law.

© 2007, Matsushita Electric Industrial Co., Ltd.

All rights reserved.

Table of Contents

1 Introduction.....	3
1.1 About this manual	3
1.1.1 Conventions.....	3
2 Picture	4
2.1 Preparation	4
2.2 Picture Menu	4
2.2.1 Picture Viewer	5
2.2.1.1 Preview (See the figure 4).....	5
2.2.2 Opening Picture.....	5
2.2.2.1 Customize.....	5
2.2.3 Slideshow Settings	6
3 Phone (Hands-Free)	6
3.1 Phone Menu	6
3.1.1 Keypads.....	7
3.1.1.1 Adjusting the phone status	8
3.1.2 Contacts	8
3.1.3 Call History	9
3.1.4 Redial	9
3.1.5 Find other phone	9
3.1.5.1 Registering	10
3.1.5.2 Success Pairing.....	10
3.1.5.3 Failed Pairing.....	10
3.1.6 Connect	10
3.1.6.1 Success Pairing.....	10
3.1.6.2 Failed Pairing.....	10
3.1.7 Incoming call.....	11
3.2 Pairing	12
3.2.1 Preparation	12
3.2.2 Find Other Phone	12
3.2.3 Connect	13

1 Introduction

1.1 About this manual

1.1.1 Conventions

For better legibility and clarification, the following styles are used in this manual:

SMALL CAPITALS: Window and dialogue box titles.

Bold: Highlighting of important parts in the text.

Underlined: Descriptions of buttons, input fields and other elements on the user interface.

2 Picture


2.1 Preparation

1. Remove the SD Memory Card that contains Map. (A)
2. Insert the SD Memory Card that contains Picture content. (B)

The system reactivates.

Note:

Insert the SD Memory Card that contains Map when you use the navigation functions.

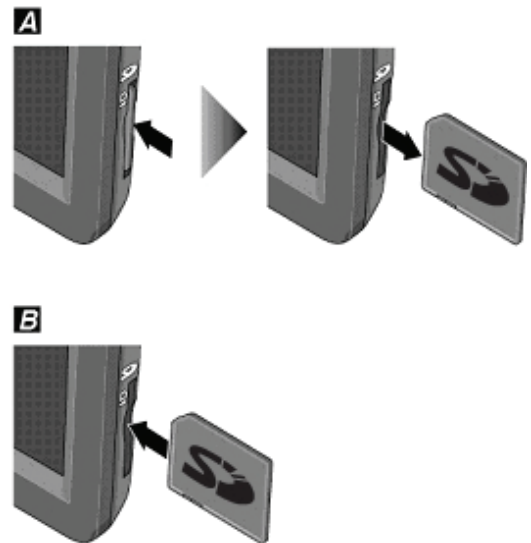

2.2 Picture Menu

When you turn on the device, you will see the **MENU** window (figure 1). Tap the Picture button.

PICTURE MENU window opens.

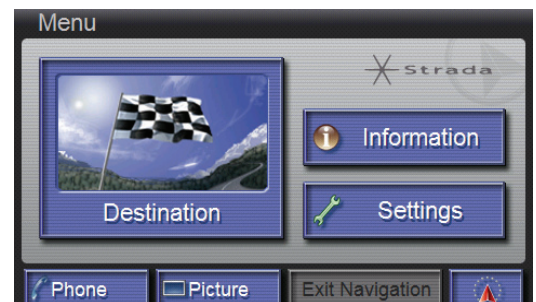


figure 1

Picture viewer: The **PICTURE MENU** window opens.

(See the figure 3).

Opening Picture: The **OPENING PICTURE** window opens.

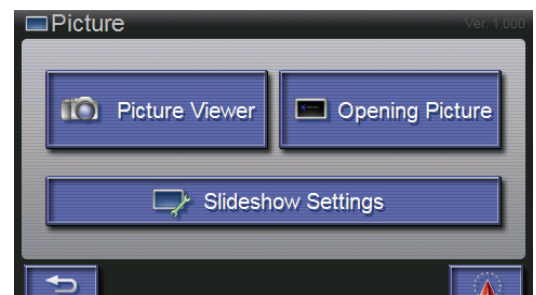


figure 2

Slideshow Settings: The **SLIDESHOW SETTINGS** window opens.



(Back): Back to previous page (**MENU** window opens).



(Show map): The map opens.



figure 3

2.2.1 Picture Viewer



(To the left): Go to left page.



(To the right): Go to right page.

Preview: Preview and rotate the selected picture.

Slideshow: Slideshow the selected picture file.

To stop the Slideshow, tap the picture.

2.2.1.1 Preview (See the figure 4)

Left Turn: Turn the picture 90 degree Counterclockwise.

Right Turn: Turn the picture 90 degree clockwise.

Half Turn: Turn the picture 180 degree.



figure 4

2.2.2 Opening Picture

Customize: To get into Customize page to customize a picture file to be opening picture.

Default: Use the default picture file (Strada logo).

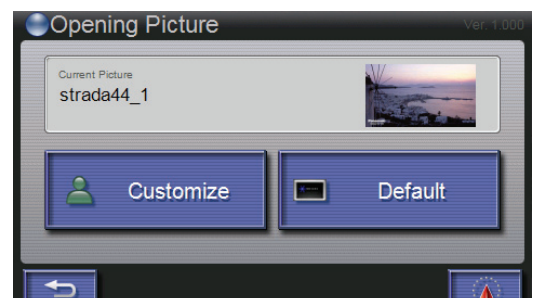


figure 5

2.2.2.1 Customize

Preview: Preview and rotate the selected picture file


(See the figure 4).

OK: Set the selected picture to be opening picture.



figure 6

2.2.3 Slideshow Settings

Tap  (Toggle) button to alternate between the possible values.

Switching Time: Set each picture slideshow every 1, 2, 3, 4 or 5 second.

Mode

Normal: Picture showing by chosen sequentially.

Random: Picture showing by random type.

Note:

Switching Time might become longer than the setting according to the file size of the picture.

3 Phone (Hands-Free)

For the models to be supported, visit the Web Site at <http://panasonic.net>

(Refer to the description regarding Portable Car Navigation.)

We do not guarantee that all the functions of this unit are available on all mobile phones.

When you turn on the device, you will see the **MENU** window (figure 1). Tap the Phone button.

PHONE MENU window opens.

3.1 Phone Menu

Keypads: To get into the Keypads mode. Key-in the number for the connected mobile phone.

Contacts: Contact address book. It could be stored 500 data.

Call History: The history of dial out and received message.

Redial: Redial the phone number.

Find Other Phone: Searching for other Bluetooth device.

Connect: List last 5 pairing Bluetooth device, and you can select one to connect mobile phone.

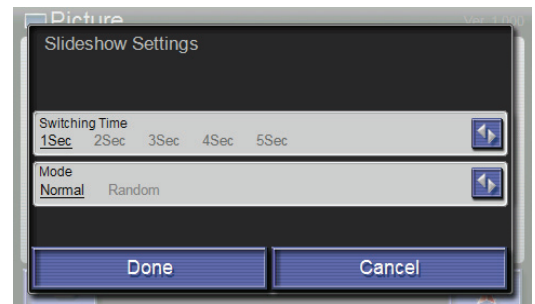


figure 7

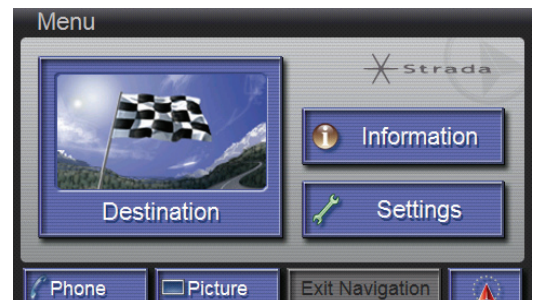


figure 1

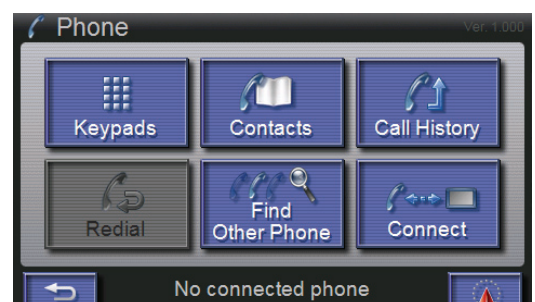


figure 8



(Back): Back to previous page.



(Show map): The map opens.

3.1.1 Keypads

For dialing phone number and using contact information.

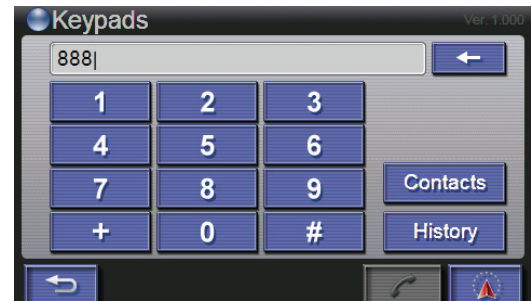


figure 9

Numeral keys: Key in the phone number.

Contacts: Into the Contacts mode.

History: Into the History mode.



: Delete the key in number.





: Dial out the phone number.



(Show map): The map opens.

When the map is displayed while talking over the telephone,

the  button is displayed in the map.

The telephone can be hung up by pushing the  button in the map.

3.1.1.1 Adjusting the phone status

When you dial out the phone number, the panel will show the message (figure 10) to adjust the phone status



(Volume) : Adjust phone volume.



: Hang up the phone. When you press the button, the menu will clear.

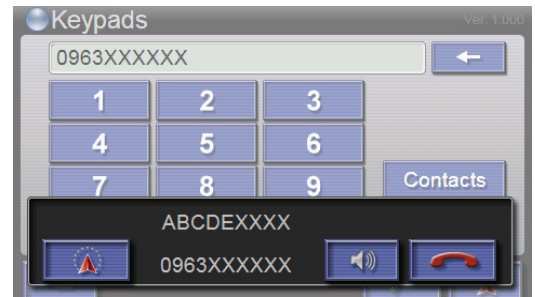


figure 10

3.1.2 Contacts

There are contact information that user can input the address and phone number. The phone book can store 500 data (figure 11).

Import Address: To transfer your address book from mobile phone to this device (figure 12).

#ab - xyz: Use alphabet to find out the contact data.



: To delete the selected data, then you have to confirm Yes or No (figure 13).



: To delete all data, then you have to confirm Yes or No (figure 14).



: Dial the phone number. Then screen will show dialing page (figure 10) and dial the phone number.



figure 11

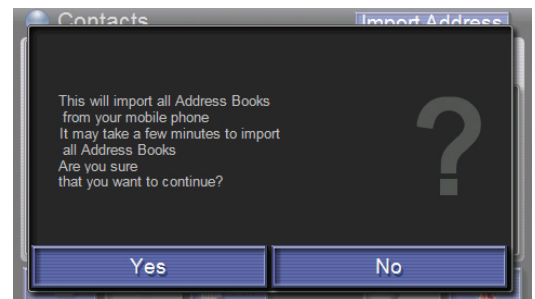


figure 12

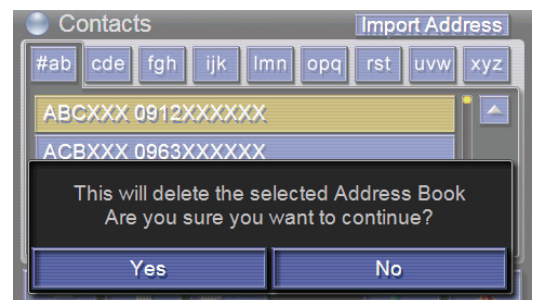


figure 13

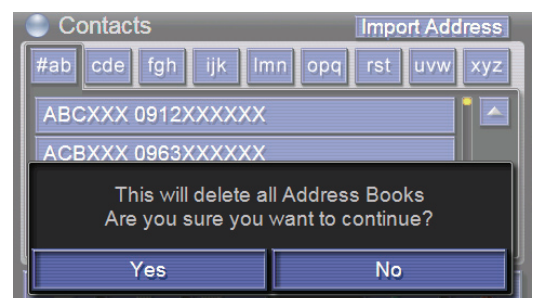


figure 14

3.1.3 Call History

The device will record the communication by phone.


It will list last 20 calls each type.



: Dial history list (figure 15).



: Received history list (figure 15).



: Miss received history list (figure 15).



figure 15

3.1.4 Redial

It will redial the number. If you press redial button, screen will show the message (figure 16).

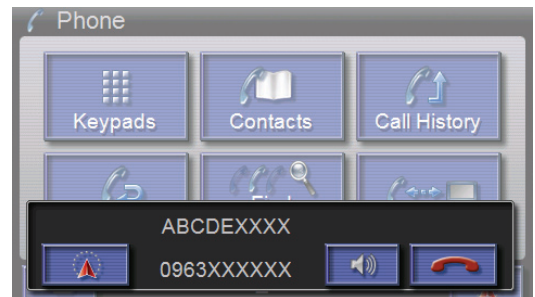


figure 16

3.1.5 Find other phone

The function is searching for Bluetooth device.

When you find out the device, select it (figure 17).



figure 17

3.1.5.1 Registering

If Registering code is unnecessary, or after you enter the registering code, the device will connect to another device automatically (figure 18).

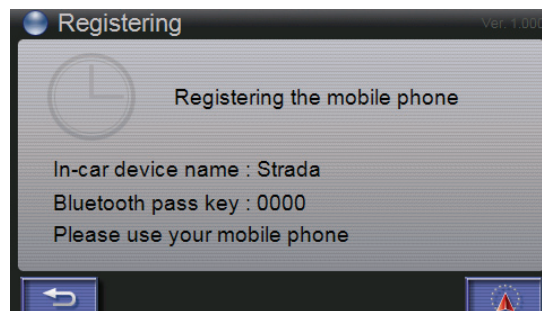


figure 18

3.1.5.2 Success Pairing

If device pairing successfully, the panel will show the success message (figure 19).

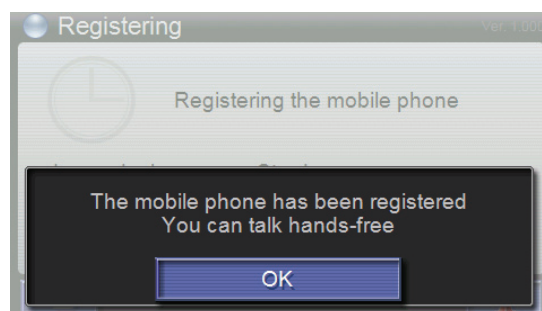


figure 19

3.1.5.3 Failed Pairing

If device pairing failed, the panel will show the failed message (figure 20). Please check the registering code or the mobile phone.

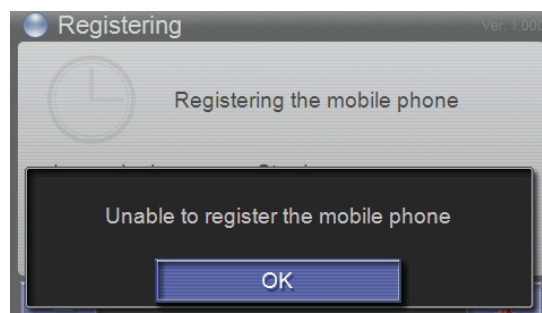


figure 20

3.1.6 Connect

To connect to the device. There are last 5 pairing record on the screen (figure 21). You can choose one and the device will connect to the mobile phone directly.

3.1.6.1 Success Pairing

If device pairing successfully, the screen will show success message (figure 19).

3.1.6.2 Failed Pairing

If device pairing failed, the screen will show failed message (figure 20). Please check the registering code or the mobile phone.

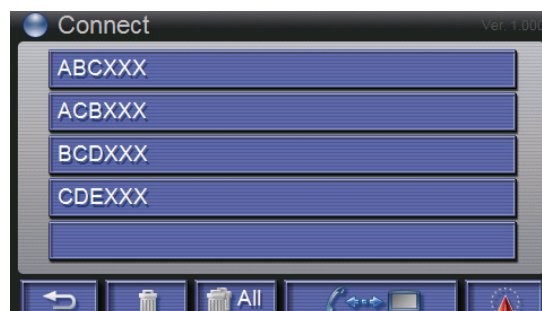


figure 21

3.1.7 Incoming call

If you receive incoming call, the screen will show the message (figure 22).

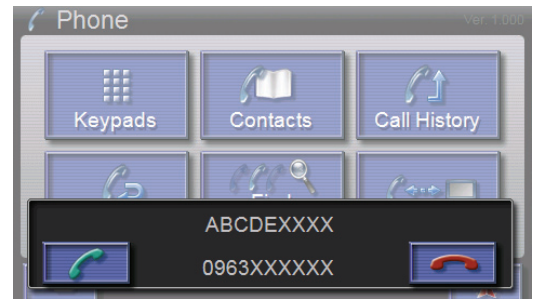


figure 22



:Accept incoming call (figure 23).



:You can adjust the volume level.



:(Show map): The map opens.

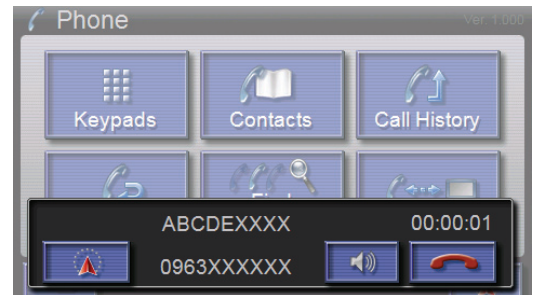




figure 23

When the map is displayed while talking over the telephone, the  button is displayed in the map.

The telephone can be hung up by pushing the  button in the map.



:Disconnect the incoming call (figure 24).

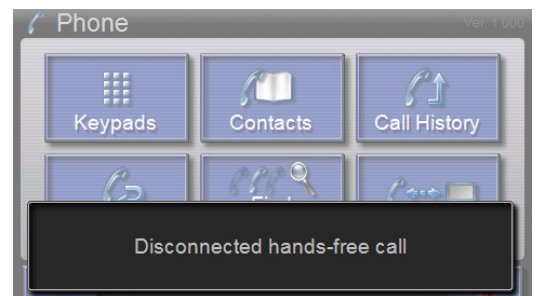


figure 24

3.2 Pairing

3.2.1 Preparation

Turn on the power of the mobile phone that will pair this unit and then set it to standby mode.

Note

Refer to the Operating Instructions of the mobile phone regarding its operation.

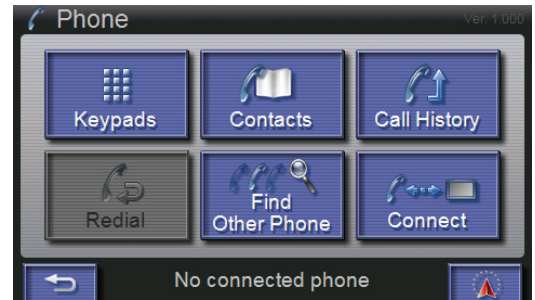


figure 8

3.2.2 Find Other Phone

- 1 Tap Phone button on **MENU** window.
 - **PHONE MENU** window is displayed.
- 2 Tap Find Other Phone button. (figure 8)
 - Start a search for Bluetooth supported devices in the area of this unit.
 - After completing the search, a list of Bluetooth supported devices are displayed (up to 5 items).
- 3 Select the Mobile phone that you want to pair from the list. (figure 25)
 - **REGISTERING** window is displayed. (figure 26)
- 4 Search for this unit from the mobile phone and then input the Bluetooth pass key.
 - Name: Strada
 - Bluetooth pass key: 0000
- 5 Confirm the message and then tap OK button.
 - If “The mobile phone has been registered You can talk hands-free” is displayed, pairing has been completed normally and the Bluetooth supported device has been connected to this unit. (figure 27)
 - If “Unable to register the mobile phone” is displayed, pairing has failed. Try to establish pairing again from procedure 1. (figure 28)



figure 25

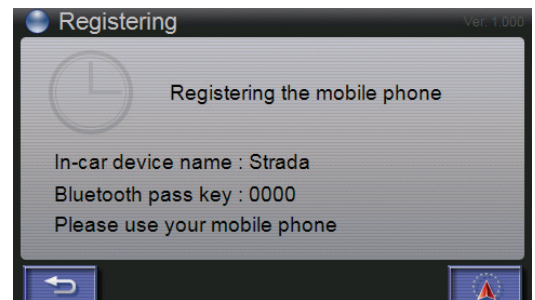


figure 26

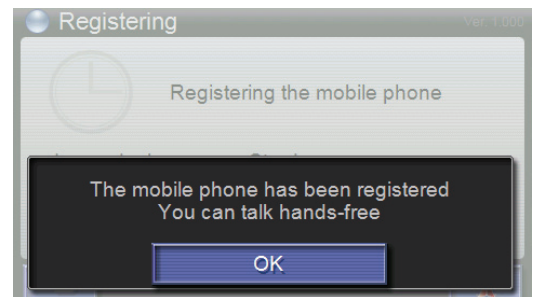


figure 27

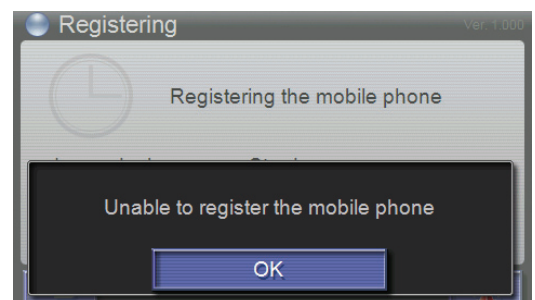


figure 28

3.2.3 Connect

This unit remembers previously paired Bluetooth supported devices (up to 5 devices in reverse chronological order).

These devices can simply connect without the search and authentication process.

- 1 Tap Connect button from **PHONE MENU** window.
 - A list of previously paired Bluetooth supported devices are displayed.
- 2 Select the mobile phone that you want to pair from the list. (figure 29)
- 3 Confirm the message and then tap OK button.
 - If “The mobile phone has been registered You can talk hands-free” is displayed, the Bluetooth supported device has been connected to this unit.
 - If “Unable to register the mobile phone” is displayed, the connection failed. Try to establish pairing again from procedure 1.

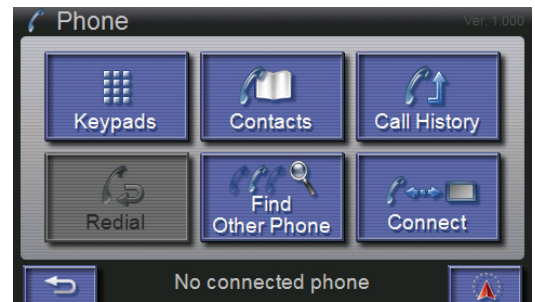


figure 8

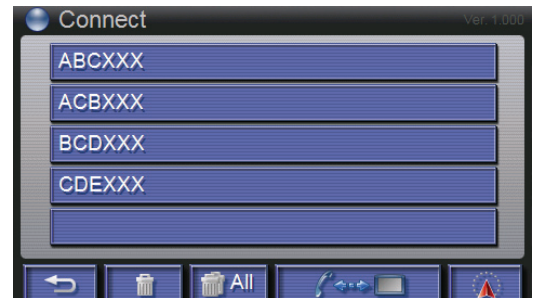


figure 29